

Infinity Lube™ Super Grease Bio is enhanced with advanced Infinity Lube Technology, delivering superior performance for both light and heavy-duty applications. This high-performance grease provides sustainability far beyond competitors, exceeding the demands of high loads, extreme temperatures, and harsh conditions in wet and dirty environments. Infinity Lube™ Super Grease Bio offers exceptional pressure protection at all speeds, outstanding thermal stability to resist oxidation and oil separation at high temperatures, and superior water resistance to protect against water washout and corrosion.

Its unique metal conditioning formulation reduces friction wear by conditioning, strengthening, and smoothing two rubbing metal surfaces at a micron level. The formula continuously lubricates, preventing friction wear and enhancing metal surfaces.

Infinity Lube™ Super Grease Bio is ideal for all greasing operations on mechanical equipment, various types of bearings, and any application where consistent metal-to-metal contact occurs.

FEATURES

- Drastically reduces friction wear and operating temperature of treated surfaces
- Increases life of bearings or any metal surface
- Removes carbon and friction points, flattens, smooths and strengthens the metal, and binds it with a protective lubricating film.
- Reduces amperage needed to operate equipment
- Prevents metal to metal seizure due to lack of lubrication by providing a unique micro-layer of lubricant film protection
- · Strengthens and smooths metals on a micron level
- Increases longevity and operating efficiency of lubricated equipment
- Anti-corrosive (impedes corrosion from rust, oxidation, dirt, etc.)
- Lowers maintenance and operating costs
- For chassis fittings, springs, water pumps, bearings, and any general lubrication
- Extremely stable
- Water resistant, excellent in wet environments
- Can be used for automatic dispensing systems
- Smooth, buttery consistency
- Compatible with all greases except clay based greases

AVAILABLE SIZES

1 Tube (14 oz)

1 Case (10 cartridges)

Master carton (40 cartridges)


SPECIFICATIONS

COLOR: Blue

APPEARANCE: Smooth / Tacky
THICKENER TYPE: Lithium Complex

CHLORINE: None DROP POINT: 550°F NLGI RATING: 2

IMPORTANT TESTING RESULTS

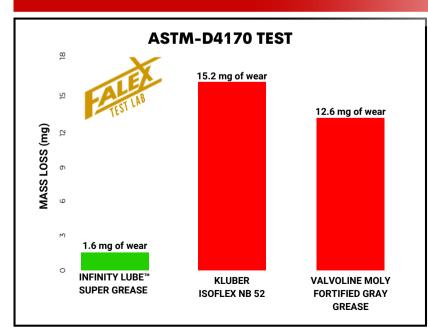

These mass loss test results above are from the Falex Lab Testing Services. The ASTM-D4170 test compares the mass loss of metal over a 22 hour period. It compared Infinity Lube™ Super Grease to two brand name greases. Test results prove that Fuel Ox® Infinity Lube™ Super Grease Bio reduces wear by as much as 700% or more than any grease on the market.